


strapex

SMG 65i, 75i / 65iS, 75iS

**Stainless steel high performance machine
for plastic strapping**

For the Food/Fish Industry

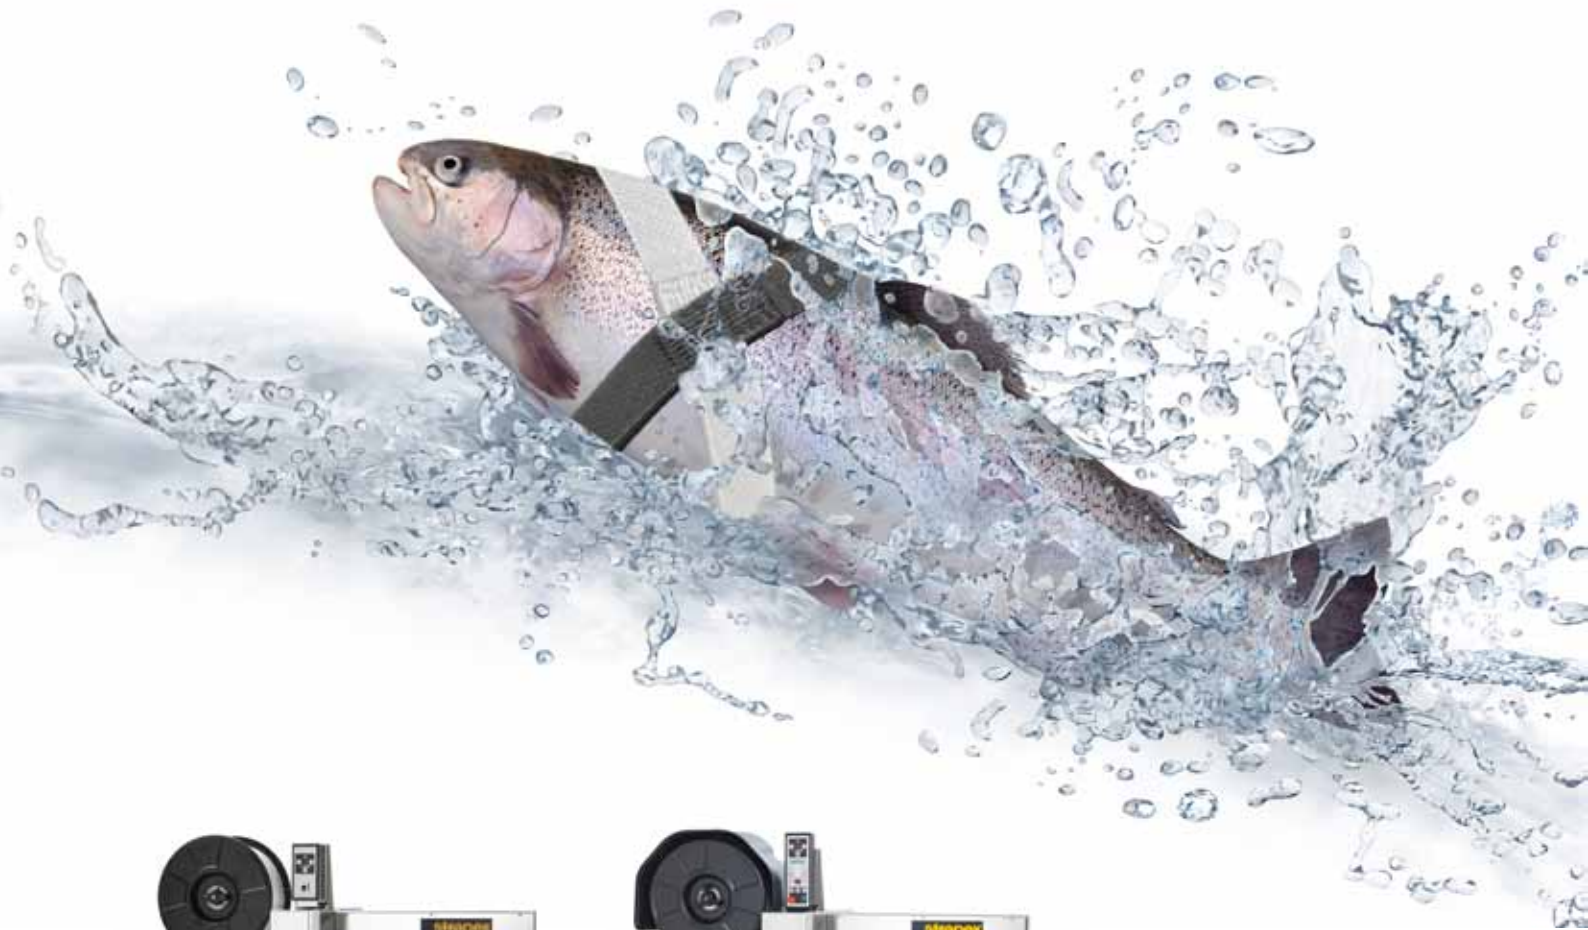

SMG 65i / SMG 65iS



SMG 75i / SMG 75iS

SWISS  MADE

SMG 65i, 75i / 65iS, 75iS

Cost effective, efficient

Easy operation

Highlights

Stainless steel construction	Highest surface quality for demanding environments, ideal for fish/food industry.
High availability	Secure strap guide due to exclusive closed strap guide system. Easy to clean and maintain.
Flexible	For integration into conveyor systems or as a stand alone machine. Pivotal control panel.
Small anvil plate	For reliable strapping of very low products ^(S-type) . Starts at 50 mm package height.
IP 56 protection	The machines are in compliance with the state of the art production requirements.



SMG 65i, 65iS

As stand alone machine or for integration into conveyor systems



SMG 75i, 75iS

With driven belt conveyor for integration into fully automatic lines



Simple adjustments, pivotable control panel



Quick coil change, automatic strap threading



Easily accessible

Strapex advantage



Machine, strap and after-sales service as a total package



Various options
Adaptable to different operating conditions and requirements



Strap for cost effective strapping
Use of thin PP strap

Technical data

Weight	SMG 65i, 65iS: from 200 kg (440 lbs)	SMG 75i, 75iS: from 280 kg (617 lbs)
Max. package weight	35 kg (77 lbs)	
Arch size	650 x 500 mm (25.5" x 19.7")	
	S-Type: 650 x 600 mm (25.5" x 23.6")	
Min. dimension of package	100 x 100 mm (WxH) / (3.9" x 3.9")	
	S-Type: from 5 x 50 mm (0.2" x 2")	
Tensioning force	40–450 N	
– manual operation	40–600 N	
– automatic operation	79 dB (A)	
Emission sound pressure level	High efficiency heat seal	
Sealing	Single phase AC	
Voltage	230 V / 50 Hz, 1PNE and 115 V / 60 Hz, 1PNE	
	Tolerance -15%/+20%	
Performance at 230 VAC		
Stand-By	SMG 65i, 65iS	50 VA, 0.3 A, 20 var, Powerfactor 0.82
Operation	SMG 65i, 65iS	370 VA, 2.2 A, 60 var, Powerfactor 0.77
Performance at 230 VAC		
Stand-By	SMG 75i, 75iS	50 VA, 0.3 A, 30 var, Powerfactor 0.53
Operation	SMG 75i, 75iS	480 VA, 2.4 A, 110 var, Powerfactor 0.95
IP 56 protection	DIN 60529	
Plastic strap		
Strap quality	Polypropylene (PP)	
Strap width	9 mm, 12 mm	
Strap thickness Polypropylene	0.40–0.60 mm (0.017"–0.025")	
Strap coil	inside-Ø 200 mm (7.8") outside-Ø 430 mm (16.8")	

www.strapex.com
foodindustry@strapex.com

Denmark
ApS Strapex
Literbuen 9
2740 Skovlunde
Phone +45 44 85 06 00
Fax +45 44 84 94 22

Holland
Strapex Nederland B.V.
Sterrebaan 10
3542 DK Utrecht
Phone +31 30 24 80 311
Fax +31 30 24 11 654

India
Strapex India Limited
506, Center Point, J.B. Nagar
Andheri-Kurla Road, Andheri (E)
Mumbai - 400 059
Phone +91-22-66400204/05
Fax +91-22-28252932

Norway
Strapex / Josef Kihlberg AS
Postboks 1916
NO-7448 Trondheim
Phone +47 73 82 06 00
Fax +47 73 82 06 10

U.K.
Strapex
Unit 50
Empire Industrial Park
Empire Close
Aldridge, Walsall, WS9 8UQ
Phone +44 1922 742 500
Fax +44 1922 742 501

USA
Acme
An ITW Company
501 W. Lake Street, Suite 105
Elmhurst, IL 60126
Phone +1 630-589-5100
Fax +1 630-589-5101